



BasH accuracy	<p>Thermocouple: Within $\pm 0.2\%$ of each input span ± 1 digit However, R, S input, 0 to 200°C (32 to 392°F): Within $\pm 6^\circ\text{C}$ (12°F) B input, 0 to 300°C (32 to 572°F): Accuracy is not guaranteed. K, J, E, T, N input, Less than 0°C (32°F): Within $\pm 0.4\%$ of input span ± 1 digit</p> <p>RTD : Within $\pm 0.1\%$ of each input span ± 1 digit Direct current : Within $\pm 0.2\%$ of each input span ± 1 digit DC voltage : Within $\pm 0.2\%$ of each input span ± 1 digit</p>																				
Input sampling period	125 ms																				
Control output	<p>Relay contact 1a1b: Control capacity: 3 A 250 V AC (resistive load), 1 A 250 V AC (inductive load $\cos\phi=0.4$) Electrical life: 100,000 cycles</p> <p>Non-contact voltage (for SSR drive): 12 V DC$\pm 15\%$ Max. 40 mA (short circuit protected)</p> <p>Direct current: 4 to 20 mA DC (Resolution: 12000) Load resistance: Max. 600 Ω</p>																				
Event output EV1	<p>Relay contact 1a Control capacity: 3 A 250 V AC (resistive load), 1 A 250 V AC (inductive load $\cos\phi=0.4$) Electrical life : 100,000 cycles</p>																				
Event output EV2	<p>Relay contact 1a Control capacity: 3 A 250 V AC (resistive load), 1 A 250 V AC (inductive load $\cos\phi=0.4$) Electrical life : 100,000 cycles</p>																				
Event output EV3, EV4	<p>Relay contact 1a Control capacity: 3 A 250 V AC (resistive load), 1 A 250 V AC (inductive load $\cos\phi=0.4$) Electrical life : 100,000 cycles Event output EV3 and EV4 share one common terminal.</p>																				
Program performance	<p>Number of patterns : 16 (Linkable) Number of steps : 256 (16 steps/pattern) Number of repetitions: 0 to 9999 times (Repetitions disabled when set to 0.) Program time range : 0 to 99 hours 59 minutes/step, or 0 to 99 minutes 59 seconds/step (When <input type="checkbox"/> is set: Fixed value control is performed using step SV.) Wait value : Thermocouple, RTD input without decimal point: \pm (0 to 100)°C(°F) Thermocouple, RTD input with decimal point: \pm (0.0 to 100.0)°C(°F) DC voltage, current input: \pm (0 to 1000) (The placement of the decimal point follows the selection.) (The Wait function is disabled when set to 0 or 0.0.)</p>																				
Serial communication (optional)	<p>Communication line : EIA RS-232C (C option), EIA RS-485 (C5 option) Communication method : Half-duplex communication Synchronization method: Start-stop synchronization Communication speed : 9600, 19200, 38400 bps (Factory default: 9600 bps) Data bit : 7 or 8 (Factory default: 7 bits) Parity : Even, Odd, No parity (Selectable by keypad) (Factory default: Even) Stop bit : 1 or 2 (Selectable by keypad) (Factory default: 1) Data format:</p> <table border="1"> <thead> <tr> <th>Communication protocol</th> <th>Shinko protocol</th> <th>M286 ASCII</th> <th>M286 RTU</th> </tr> </thead> <tbody> <tr> <td>Start bit</td> <td>1</td> <td>1</td> <td>1</td> </tr> <tr> <td>Data bit</td> <td>7</td> <td>7 or 8</td> <td>8</td> </tr> <tr> <td>Parity</td> <td>Even</td> <td>Even (No parity, Odd) Selectable</td> <td>No parity (Even, Odd) Selectable</td> </tr> <tr> <td>Stop bit</td> <td>1</td> <td>1 or 2</td> <td>1 or 2</td> </tr> </tbody> </table> <p>SV digital transmission: If 'SV digital transmission' is selected in [Communication protocol] in Serial communication, SV can be digitally transmitted to Shinko indicating controllers (with Serial communication C5 option). Update cycle: 250 ms</p>	Communication protocol	Shinko protocol	M286 ASCII	M286 RTU	Start bit	1	1	1	Data bit	7	7 or 8	8	Parity	Even	Even (No parity, Odd) Selectable	No parity (Even, Odd) Selectable	Stop bit	1	1 or 2	1 or 2
Communication protocol	Shinko protocol	M286 ASCII	M286 RTU																		
Start bit	1	1	1																		
Data bit	7	7 or 8	8																		
Parity	Even	Even (No parity, Odd) Selectable	No parity (Even, Odd) Selectable																		
Stop bit	1	1 or 2	1 or 2																		
Time signal output (optional)	<p>Number of circuits: 8 Open collector : Capacity: 24 V DC, Max. 50 mA</p>																				
Transmission output (optional)	<p>Resolution : 12000 Output : TA option: 4 to 20 mA DC (Load resistance: Max. 500 Ω) TV option: 0 to 1 V DC (Load resistance: Min. 100 kΩ) Output accuracy: Within $\pm 0.3\%$ of Transmission output span</p>																				
Heating/Cooling control output (optional)	<p>If the <input type="checkbox"/> option is ordered, Event output EV2 will be disabled. Relay contact 1a (DR option): Control capacity: 3 A 250 V AC (resistive load), 1 A 250 V AC (inductive load $\cos\phi=0.4$) Electrical life: 100,000 cycles Non-contact voltage(for SSR drive) (DS option): 12 V DC$\pm 15\%$ Max. 40 mA (short circuit protected) Direct current (DA option): 4 to 20 mA DC (Resolution: 12000) Load resistance: Max. 600 Ω</p>																				

Terminal Arrangement

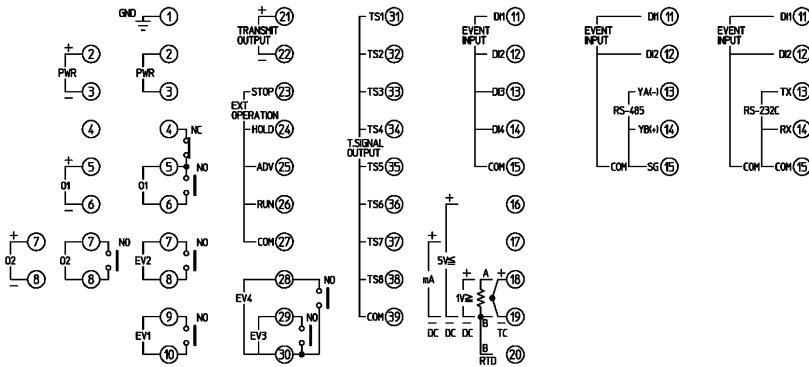


GND	Grounding
PWR	Power supply 100 to 240 V AC or 24 V AC/DC For a 24 V AC/DC power source, ensure polarity is correct when using direct current (DC).
O1	Control output OUT1
O2	Control output OUT2 (DR, DS or DA option)
EV1	Event output EV1
EV2	Event output EV2
EV3	Event output EV3
EV4	Event output EV4
EVENT INPUT	Event input
RS-485/RS-232C	Serial communication RS-485 (C5 option) or RS-232C (C option)
TC	Thermocouple input
RTD	RTD input
DC 1V \geq	DC voltage input: 0 to 10 mV DC, -10 to 10 mV DC, 0 to 50 mV DC, 0 to 100 mV DC, 0 to 1 V DC
DC 5V \leq	DC voltage input: 0 to 5 V DC, 1 to 5 V DC, 0 to 10 V DC
DC mA	Direct current input: 0 to 20 mA DC, 4 to 20 mA DC
TRANSMIT OUTPUT	Transmission output (TA or TV option)
EXT OPERATION	External operation input: STOP, HOLD, ADV, RUN
T.SIGNAL OUTPUT	Time signal output (TS option)

External Dimensions (Scale: mm)

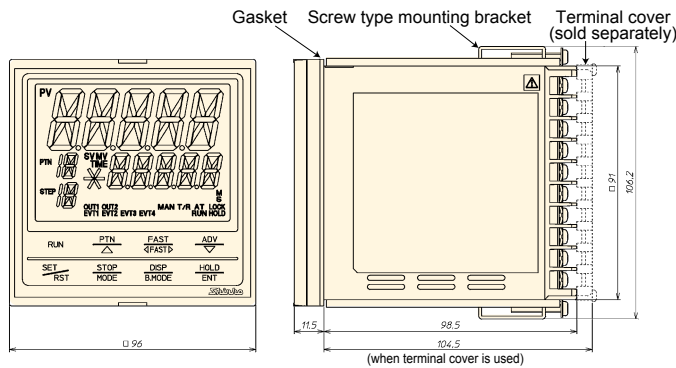

Panel Cutout (Scale: mm)

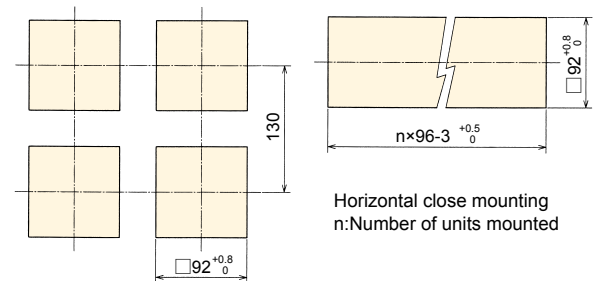

Caution
If horizontal close mounting is used for the controller, Drip-proof/Dust-proof IP66 may be compromised, and all warranties will be invalidated.



- To ensure safe and correct use, thoroughly read and understand the manual before using this instrument.
- This instrument is intended to be used for industrial machinery, machine tools and measuring equipment. Verify correct usage after **purpose-of-use consultation** with our agency or main office.
(Never use this instrument for medical purposes with which human lives are involved.)
- External protection devices such as protection equipment against excessive temperature rise, etc. must be installed, as malfunction of this product could result in serious damage to the system or injury to personnel. Also proper periodic maintenance is required.
- This instrument must be used under the conditions and environment described in the manual. Shinko Technos Co., Ltd. does not accept liability for any injury, loss of life or damage occurring due to the instrument being used under conditions not otherwise stated in this manual.

Caution with respect to Export Trade Control Ordinance
To avoid this instrument from being used as a component in, or as being utilized in the manufacture of weapons of mass destruction (i.e. military applications, military equipment, etc.), please investigate the end users and the final use of this instrument. In the case of resale, ensure that this instrument is not illegally exported.

- This catalog is as of Jan. 2021 and its contents are subject to change without notice.
- Photos used in this catalog do not show unit in operating status.
- If you have any inquiries, please consult us or our agency.

SHINKO TECHNOS CO., LTD. OVERSEAS DIVISION

Head Office : 2-5-1, Senbahigashi, Minoo, Osaka, 562-0035, Japan
Tel : +81-72-727-6100
Fax : +81-72-727-7006
URL : <http://www.shinko-technos.co.jp/e/>
E-mail : overseas@shinko-technos.co.jp